

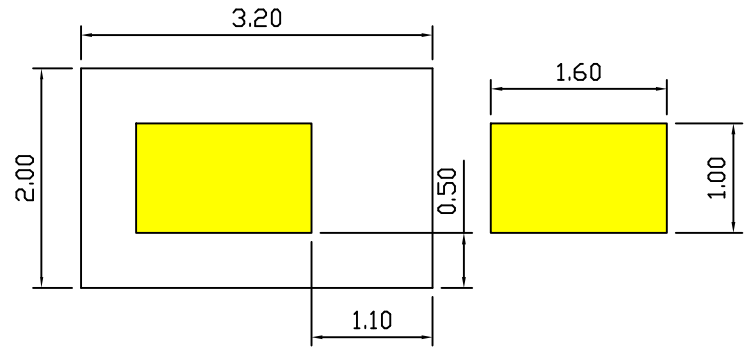
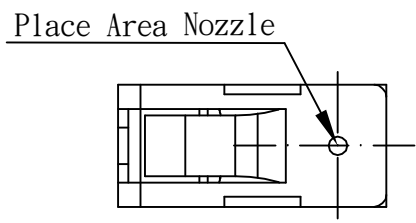

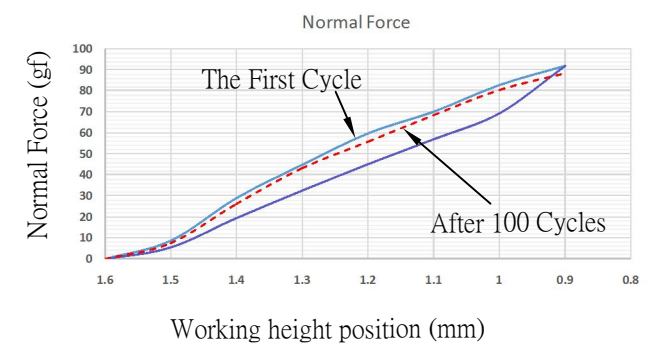




00 10/19-'16

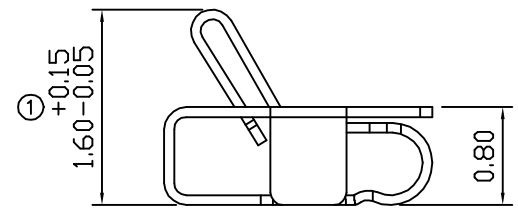

RECOMMENDED SOLDERING PCB LAYOUT  
TOLERANCE(.XX±0.05)



- Note:
1. Material: Stainless Steel Thickness 0.08mm
  2. Electroplate:
    - Gold Flash on contact area
    - Gold Flash on solder area
    - Nickel underplating over all
  3. Electrical Characteristics:
    - 3-1 Current Voltage: 12V
    - 3-2 Current Rate: 3A
    - 3-3 Contact Resistance: Normal Compression < 50mΩ
  4. Working Height of Application: 0.90~1.20 mm
  5. Spring Force Tolerance is ±20gf
  6. Operating Temperature: -20℃~+85℃


00	10/19-'16	Design creation			
REV	Date	Description			
DRAFT	Hardy Hsieh	DATE	10/19-'16	<b>RoHS</b> Compatible	
CHECKER	Justin Wu	DATE	10/19-'16		
APPROVAL	Jacky Lin	DATE	10/19-'16		
		SHEET	1-2	SCALE	Not to scale
		UNIT	mm		

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

**EMI STOP CORP.**  
 EMI STOP  
 EMISTOP QTT-16G

CUS P/N

00 10/21-19'


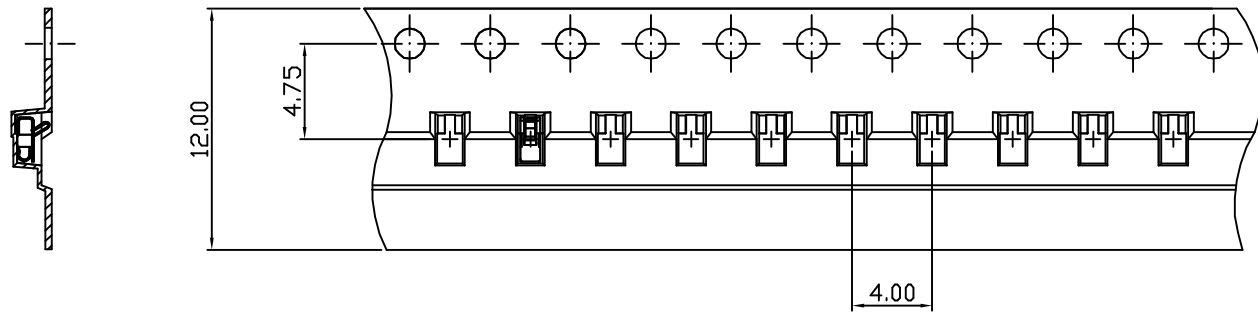


Side View



Front View

FEEDING DIRECTION

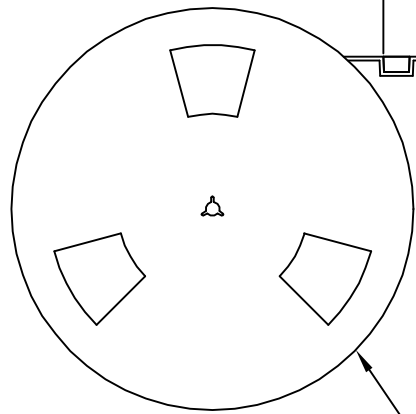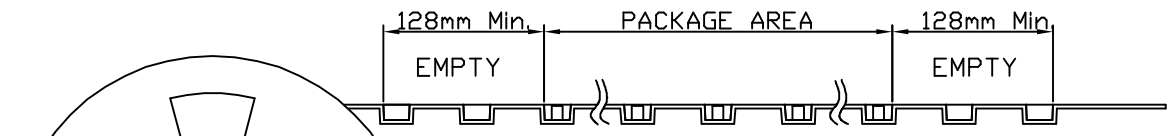


REEL(13")

Package Information:  
 1.Quantity Per Reel: 7400PCS  
 2.REEL: 13"X 12 mm

00	10/21-19'	Design creation		
REV	Date	Description		
DRAFT	Kevin Chen	DATE	10/21-19'	<b>RoHS Compatible</b>
CHECKER	Justin Wu	DATE	10/21-19'	
APPROVAL	Jacky Lin	DATE	10/21-19'	SHEET 2-2
		SCALE	Not to scale	UNIT mm

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

 **EMI STOP CORP.**  
 EMI STOP  
 EMISTOP QTT-16G  
 CUS P/N