


RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

Note:

1. Material: Stainless Steel Thickness 0.08mm
2. Electroplate:  
 Au >1u" on contact area  
 Au >1u" on solder area  
 Nickel underplating over all
3. Electrical Characteristics:  
 3-1 Current Voltage: 12V  
 3-2 Current Rate: 3A  
 3-3 Contact Resistance: Normal Compression < 50mΩ
4. Working Range of Application: 0.50~0.70 mm
5. Spring Force Tolerance is ±20gf
6. Operating Temperature: -20°C ~ +85°C




00	09/13-'17	Design creation	
REV	Date	Description	
DRAFT	Hardy Hsieh	DATE	09/13-'17
CHECKER	Justin Wu	DATE	09/13-'17
APPROVAL	Jacky Lin	DATE	09/13-'17
		SHEET	SCALE
		1-2	Not to scale
		UNIT	mm

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30 < ≤120	±0.15	0.20	0.30
120 < ≤300	±0.20	0.30	0.50
300 <	±0.30	0.50	0.80
ANGLES	±2.5°		


**EMI STOP CORP.**  
 EMI STOP  
 JC-323620G

CUS P/N


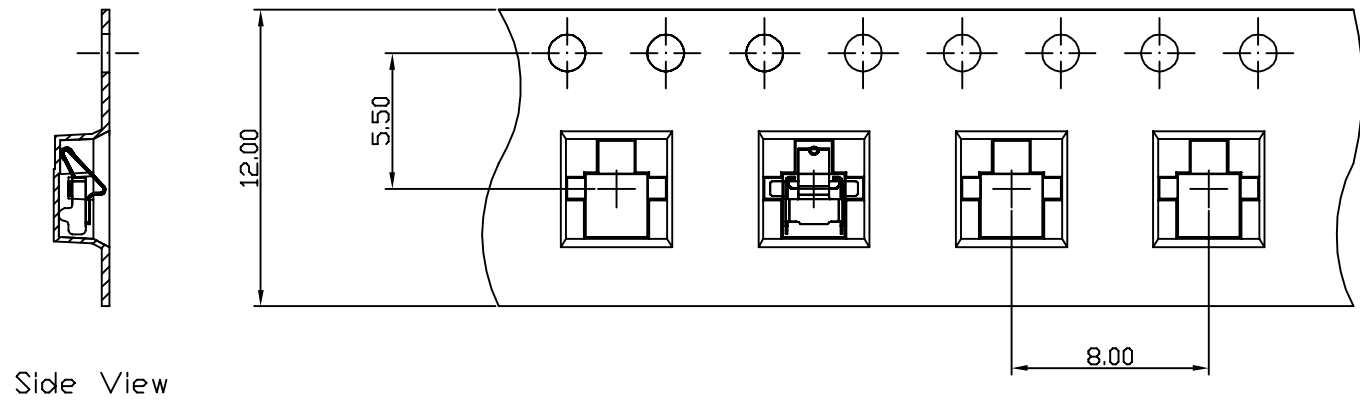


Side View

FEEDING DIRECTION



Front View

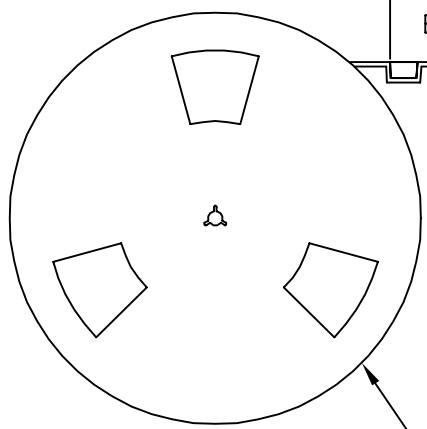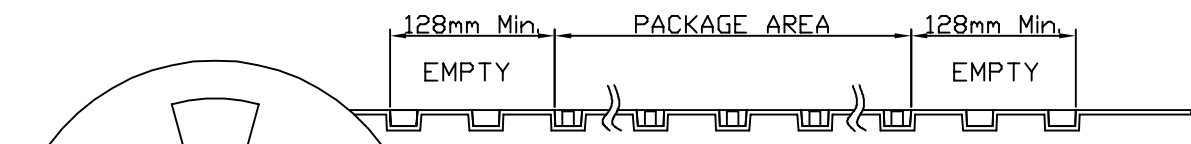


REEL(13")

Package Information:  
 1.Quantity Per Reel: 3400PCS  
 2.REEL: 13"X 12 mm

00	10/24-'19	Design creation		
REV	Date	Description		
DRAFT	Andy □	DATE	<b>RoHS</b> <b>Compatible</b>	
CHECKER	Justin Wu	DATE		
APPROVAL	Jacky Lin	DATE		
	10/24-'19	SHEET	SCALE	UNIT
		2-2	Not to scale	mm

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		


**EMI STOP CORP.**  
 EMI STOP  
 EMISTOP JC-323620G  
 CUS P/N