




# EMI SPRING - SQ SERIES


- Anti-hook design
- Stable contact point and resistance

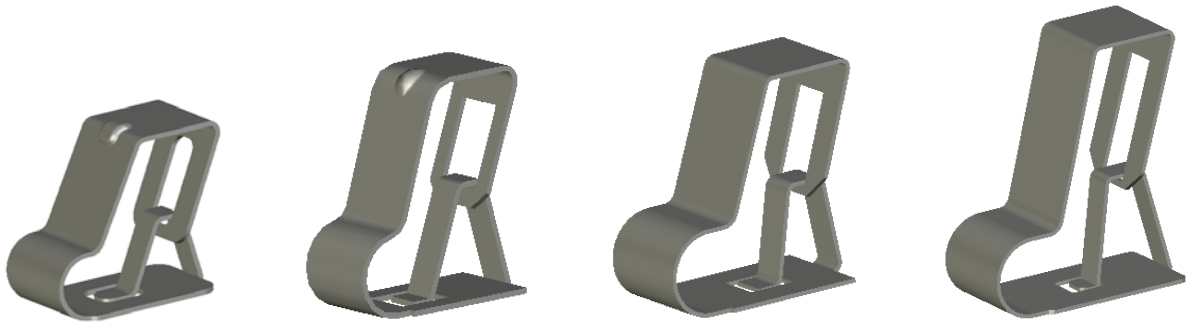

Grounding / EMI / Signal Solution


## Applications

- Antenna Contact
- Grounding Contact
- Signal Transmission



- ← Antenna/PCB
- ← SQ Spring
- ← PCB

## SQ series



P/N	Plating	Material	L (mm)	W (mm)	H (mm)	Working Height (mm)
SQ-21Q5G	Gold	Copper Alloy	3.60	1.80	2.10	1.30 ~ 1.60
SQ-26Q2G	Gold	Copper Alloy	3.40	2.00	2.60	1.80 ~ 2.30
SQ-28Q1G	Gold	Titanium Copper	2.90	1.80	2.80	1.80 ~ 2.50
SQ-33Q2G	Gold	Titanium Copper	3.65	2.00	3.30	1.90 ~ 2.80
SQ-37Q1G	Gold	Copper Alloy	4.10	2.00	3.70	2.60 ~ 3.20
SQ-39Q2G	Gold	Titanium Copper	3.95	2.50	3.90	2.40 ~ 3.60
SQ-46Q2G	Gold	Copper Alloy	4.45	2.60	4.60	3.60 ~ 4.10
SQ-51Q2G	Gold	Copper Alloy	5.00	2.50	5.10	3.80 ~ 4.70
SQ-55Q2G	Gold	Titanium Copper	5.00	2.65	5.50	3.60 ~ 4.40
SQ-63Q2G	Gold	Copper Alloy	5.35	2.50	6.30	4.00 ~ 5.80

< contact us > +886-2-8911-3450 | [service@emistop.com](mailto:service@emistop.com)

