
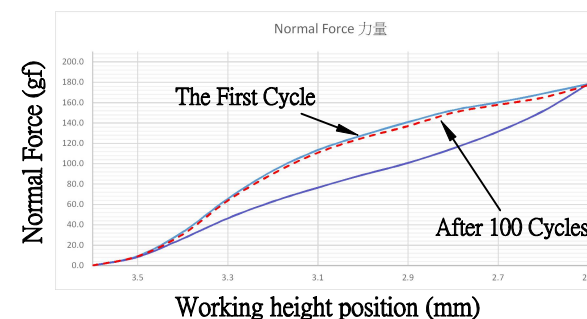
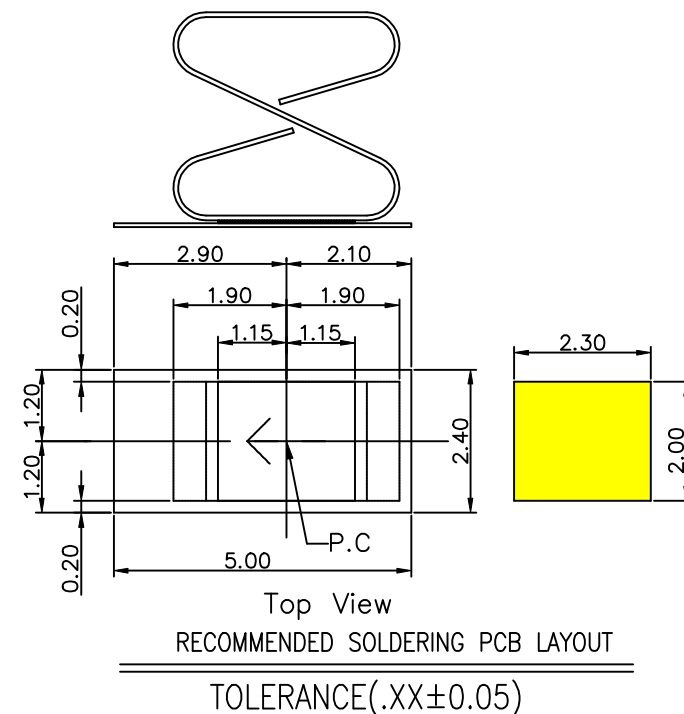
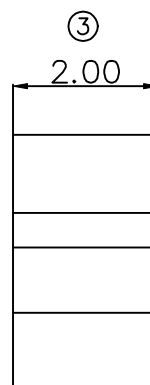

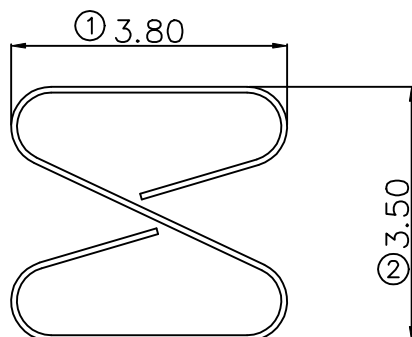




Note:

- 1.Material: Titanium Copper Thickness 0.08 mm
- 2.Electroplate: Gold Flash plating over all Nickel underplating over all
- 3.Electrical Characteristics:
 - a. Current Voltage: 12V
 - b. Current Rate: 3A
 - c. Contact Resistance; Normal Compression <30mΩ
- 4.Working Height of Application: 2.5mm~3.2mm
- 5.Spring Force Tolerance is ±20gf
- 6.Operating Temperature: -20℃~+85℃

TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

02	2022-11-25	Add<--
DRAFT	Lydia Tsai	DATE 2022-11-25
CHECKER	Justin Wu	DATE 2022-11-25
APPROVAL	Timothy Chen	DATE 2022-11-28
SHEET 1-2	SCALE Not to scale	UNIT mm
RoHS Compatible		
EMI STOP CORP.		
EMISTOP P/N S8-35Q2G		CUS P/N