
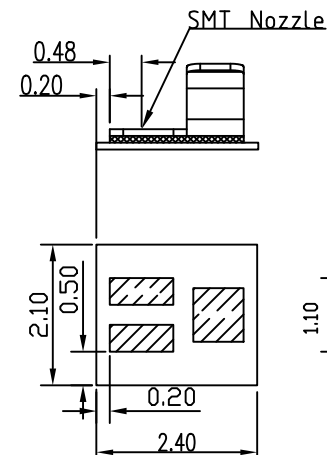

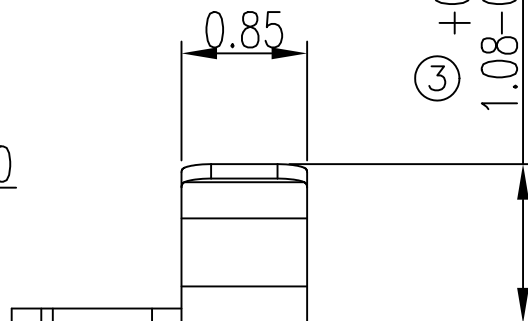
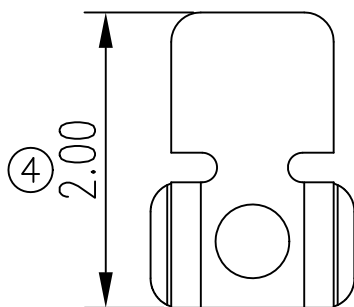
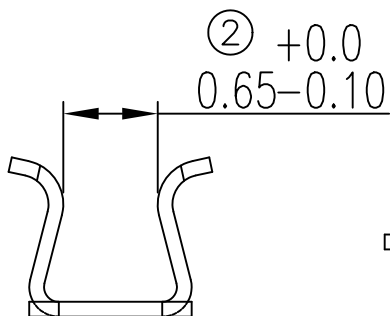


00 07/13-'17

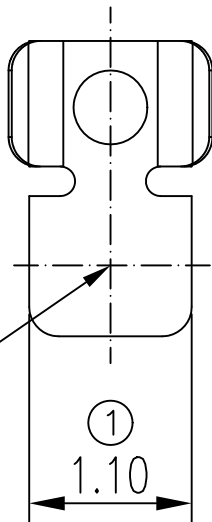

Place Area Nozzle

RECOMMENDED SOLDERING PCB LAYOUT
TOLERANCE(.XX±0.05)

Note:

1. Material: Stainless steel Thickness 0.1mm
2. Electroplate:
Matte Sn over all
Nickel underplating over all
3. Operating Temperature: -20℃~+85℃
4. Recommended conditions Ø0.81mm

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	±0.10	0.15	0.20
30<- ≤120	±0.15	0.20	0.30
120<- ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

00	07/13-'17	Design creation				
REV	Date	Description				
DRAFT	Qwen Chiang	DATE	07/13-'17	RoHS Compatible		
CHECKER	Justin Wu	DATE	07/13-'17			
APPROVAL	Jacky Lin	DATE	07/13-'17	SHEET	SCALE	UNIT
				1-2	Not to scale	mm
EMI STOP						
EMI STOP CORP.						
EMISTOP				CUS P/N		
SV-08A3Q1M						