
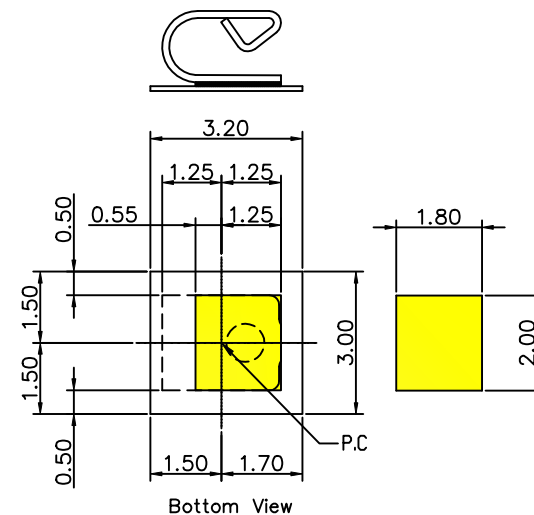
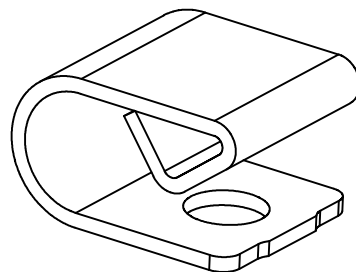
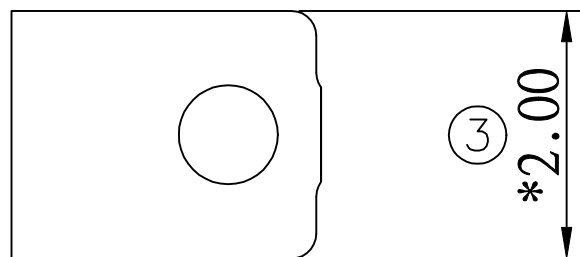



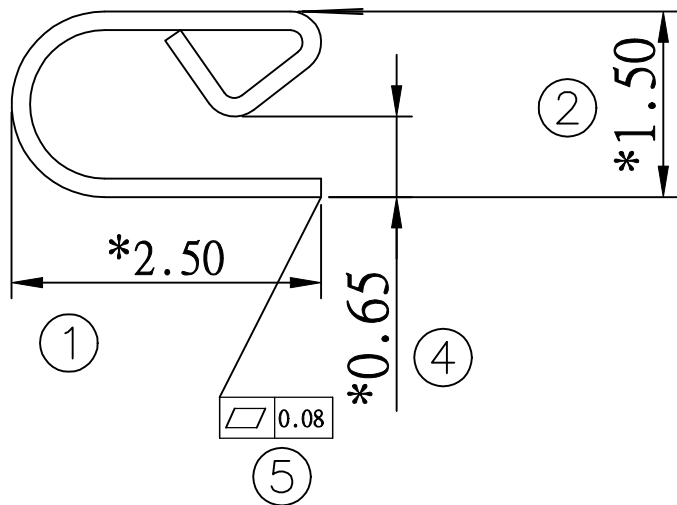

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

Note:

1. Material: Stainless Steel Thickness 0.15 mm
2. Electroplate: Matte Sn over all, Nickel underplating over all
3. Operating Temperature: -20°C~+85°C
4. Recommended conditions Ø0.8~Ø1.3 mm



01	2023-09-14	Add flatness dimension			
DRAFT	Hardy Hsieh	DATE	2023-09-14	RoHS Compatible	
	CHECKER	DATE	2023-09-14		
Robyn Liao		APPROVAL		SHEET	SCALE
Timothy Chen		2023-09-15		1-2	Not to scale
				UNIT	mm

TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		



EMI STOP CORP.

EMISTOP P/N
SU-15A1Q2M

CUS P/N