

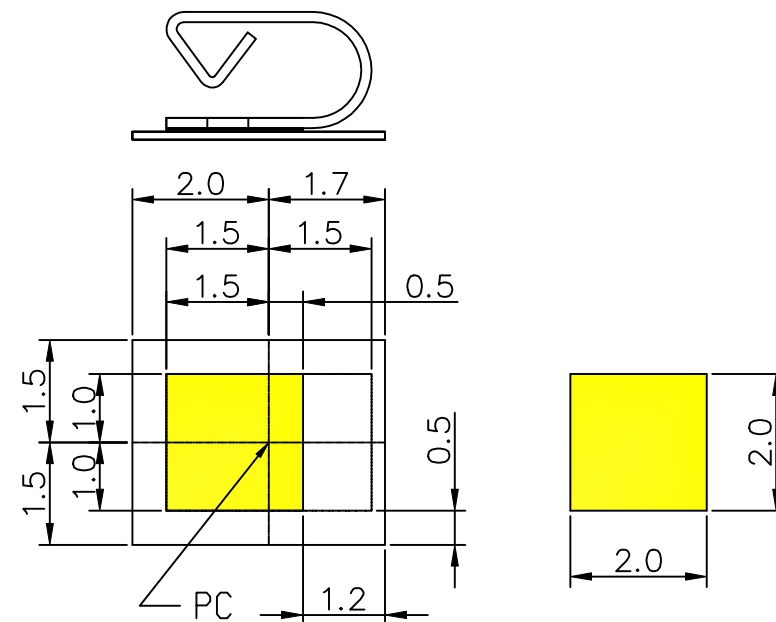



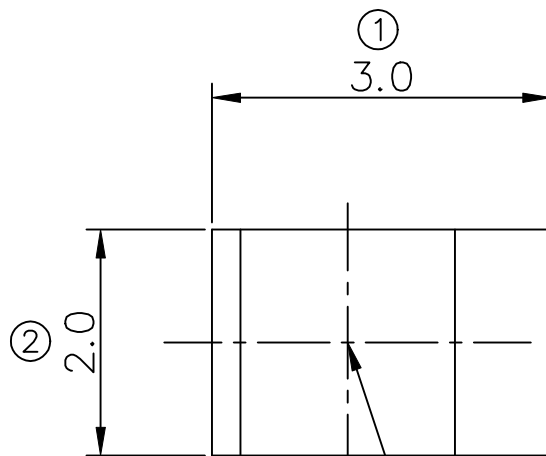

RECOMMENDED SOLDERING PCB LAYOUT

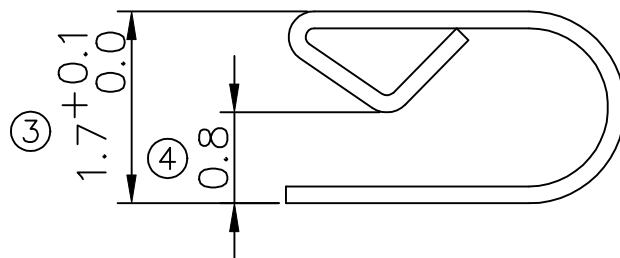

Note:

1. **Material:** Stainless Steel **Thickness** 0.15 mm
2. **Electroplate:** Nickel underplating over all, Matte Sn over all
3. **Operating Temperature:** -20°C ~ +85°C
4. **Recommended conditions** Ø1.0 ~ Ø1.3 mm



00	2022-06-16	Design Creation			
DRAFT	Jim Chiu	DATE	2022-09-26	RoHS Compatible	
CHECKER	Justin Wu	DATE	2022-09-26		
APPROVAL	Timothy Chen	DATE	2022-09-28	SHEET	1-2
		SCALE	Not to scale	UNIT	mm
					☉

TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30 < ~ ≤120	±0.15	0.20	0.30
120 < ~ ≤300	±0.20	0.30	0.50
300 <	±0.30	0.50	0.80
ANGLES	±2.5°		



EMI STOP CORP.

EMISTOP P/N
SU-17Q1M

CUS P/N