

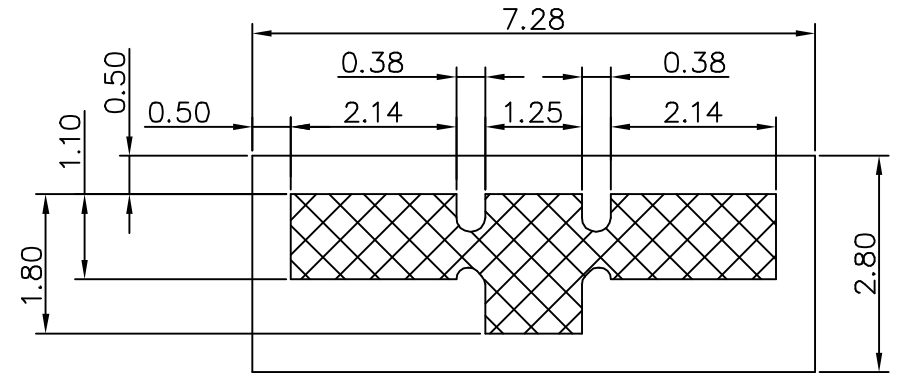
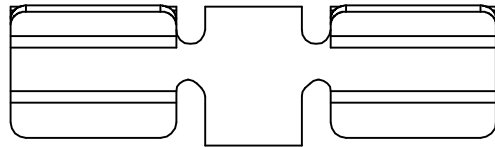
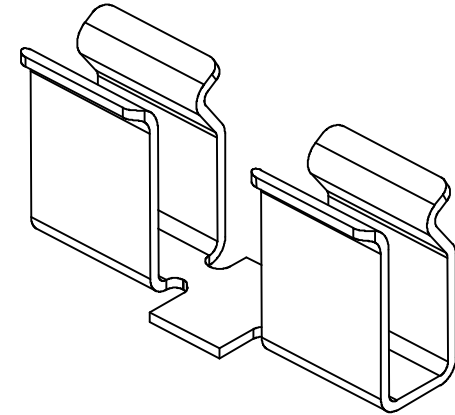


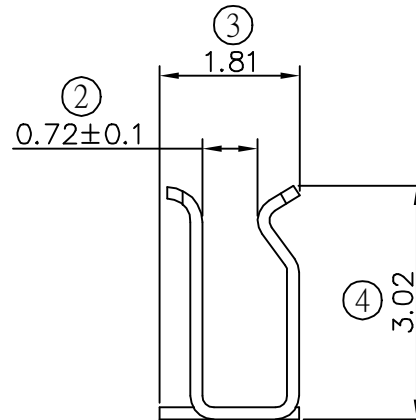

RECOMMENDED SOLDERING PCB LAYOUT

TOLERANCE(.XX±0.05)

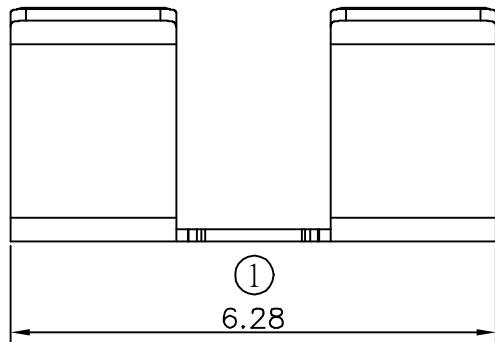

Notes:

1. Material: Stainless Steel Thickness 0.15mm
2. Electroplating:
Au >0.5u"
Nickel >60u" underplating over all
3. Electrical Characteristics:
a. Current Voltage: 12V
b. Current Rate: 3A
c. Contact Resistance; Normal Compression<50mΩ
4. Operating Temperature: -20℃~+85℃
5. Recommended conditions : $\varnothing 1.13\text{mm}$



TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

00	2021-03-12	Design Creation			
DRAFT	Benny Lin	DATE	2020-12-10	RoHS Compatible	
CHECKER	Justin Wu	DATE	2020-12-10		
APPROVAL	Jacky Lin	DATE	2020-12-10		
		SHEET	1-2	SCALE	Not to scale
		UNIT	mm		
 EMI STOP CORP.					
EMISTOP P/N SVT-113G				CUS P/N	