

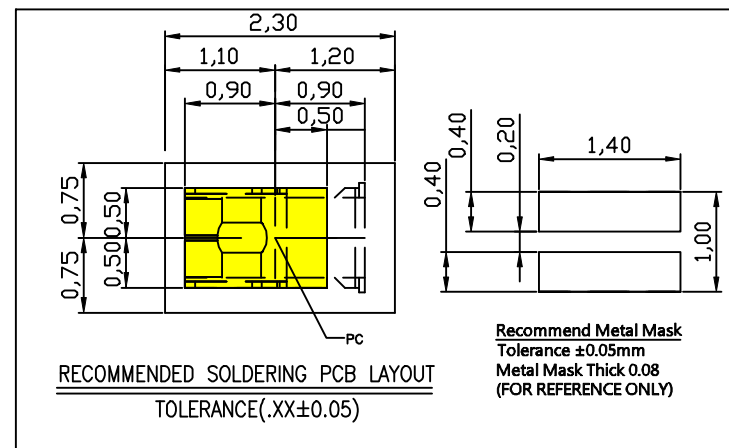
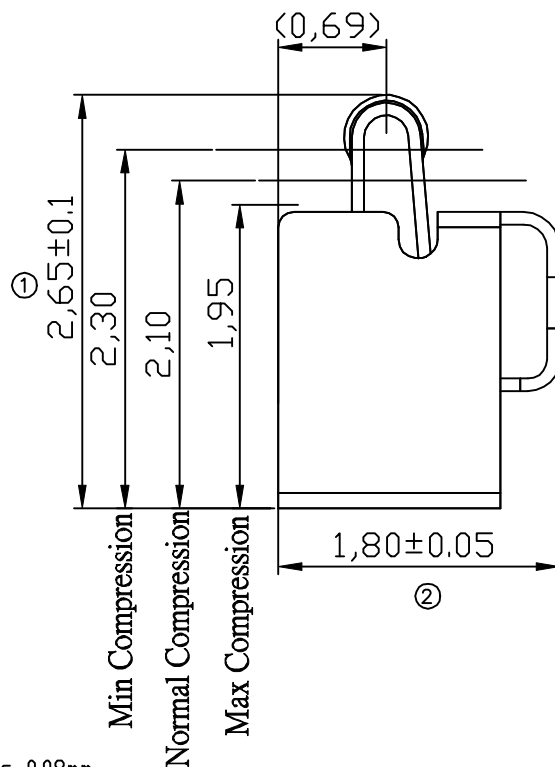
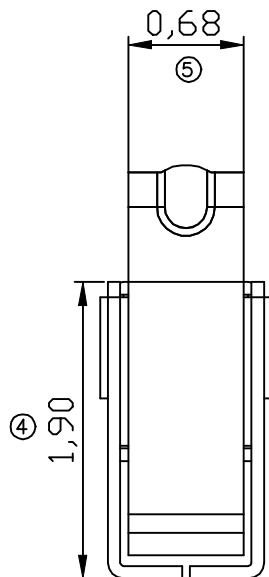
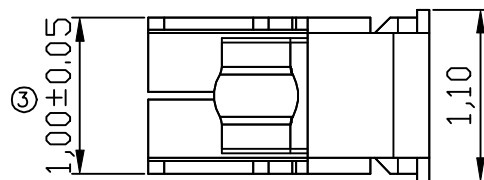


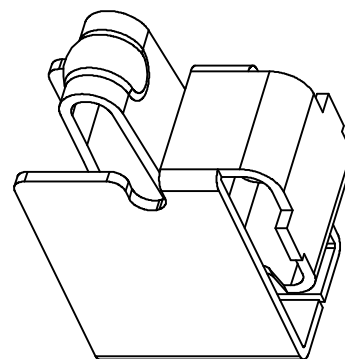

The First Cycle

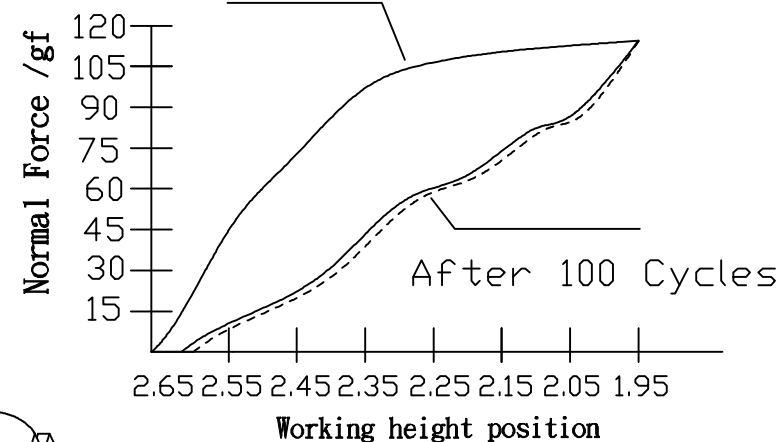

Note:

1. Material: Stainless Steel Thickness 0.08mm
2. Electroplate:
 - Au >1u" gold plating on contact area
 - Gold Flash on solder area
 - Nickel underplating over all
3. Electrical Characteristics:
 - 3-1 Current Voltage: 12V
 - 3-2 Current Rate: 3A
 - 3-3 Contact Resistance: Normal Compression < 50mΩ
4. Working Height of Application: 1.95~2.30 mm
5. Spring Force Tolerance is ±20gf
6. Operating Temperature: -20℃~+85℃

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	+ 0.1 - 0.1	+ 0.15 - 0.15	+ 0.2 - 0.2
30< - ≤120	+ 0.15 - 0.15	+ 0.2 - 0.2	+ 0.3 - 0.3
120< - ≤300	+ 0.2 - 0.2	+ 0.3 - 0.3	+ 0.5 - 0.5
300<	+ 0.3 - 0.3	+ 0.5 - 0.5	+ 0.8 - 0.8
ANGLES	+ 2.5° - 2.5°		

01	05/05-'21	Appearance update					
DRAFT	Hardy Hsieh	DATE	08/16-'19	RoHS Compatible			
CHECKER	Justin Wu	DATE	08/16-'19				
APPROVAL	Timothy Chen	DATE	08/16-'19	SHEET	SCALE	UNIT	
				1-2	Not to scale	mm	
 EMI STOP CORP.							
EMI STOP							
EMISTOP				CUS P/N			
SQT-26Q1G							