


**PC**  
RECOMMENDED SOLDERING PCB LAYOUT  
 TOLERANCE(.XX±0.05)  
**(Top View)**



- Note:**
- Material: Stainless Steel Thickness 0.05 mm
  - Electroplate: Nickel underplating over all , Au>1u" on solder area & Au>1u" on contact area
  - Electrical Characteristics:
    - Current Voltage: 12V
    - Current Rate: 3A
    - Contact Resistance; Normal Compression <50mΩ
  - Working Height of Application: 0.50~0.35mm
  - Spring Force Tolerance is ±20gf
  - Operating Temperature: -20°C~+85°C

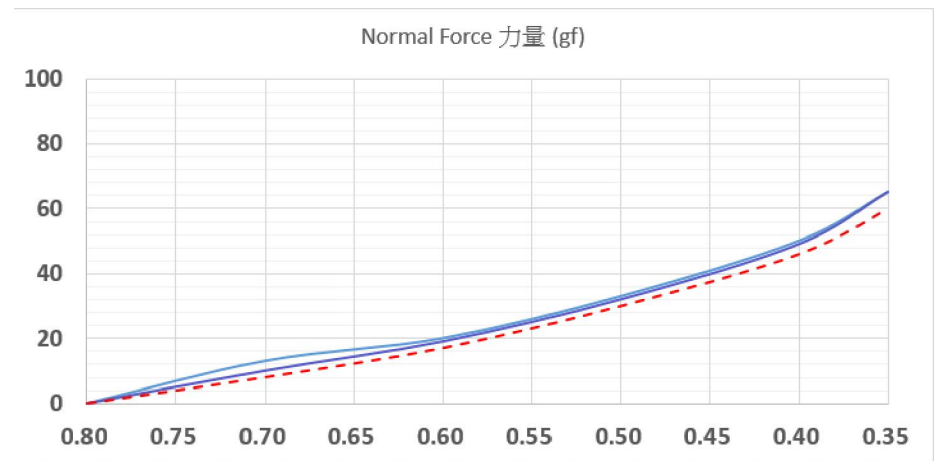

00	2022-11-16	Design Creation			
DRAFT		DATE	<b>RoHS Compatible</b>		
Hardy Hsieh		2022-11-16			
CHECKER		DATE			
Robin Liao		2022-11-16			
APPROVAL		DATE	SHEET	SCALE	UNT
Timothy Chen		2022-11-18	1-2	Not to scale	mm

TOLERANCE/CLASS			
RANGE(mm)	A	B	C
≤30	±0.10	0.15	0.20
30< ~ ≤120	±0.15	0.20	0.30
120< ~ ≤300	±0.20	0.30	0.50
300<	±0.30	0.50	0.80
ANGLES	±2.5°		

**EMI STOP CORP.**  
 EMI STOP  
 EMISTOP P/N QTT-08A1G  
 CUS P/N