
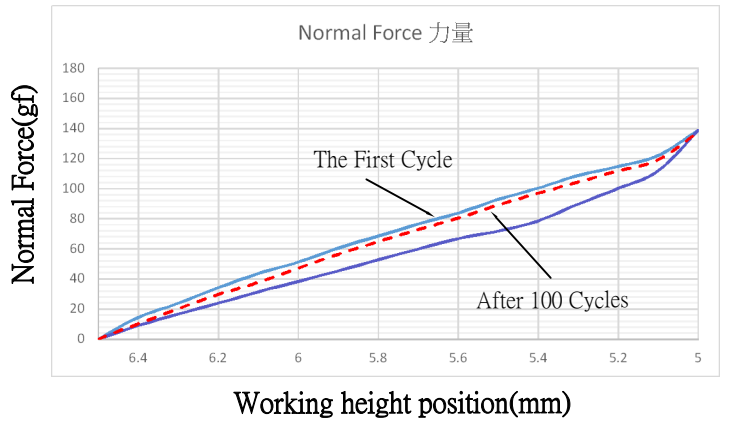
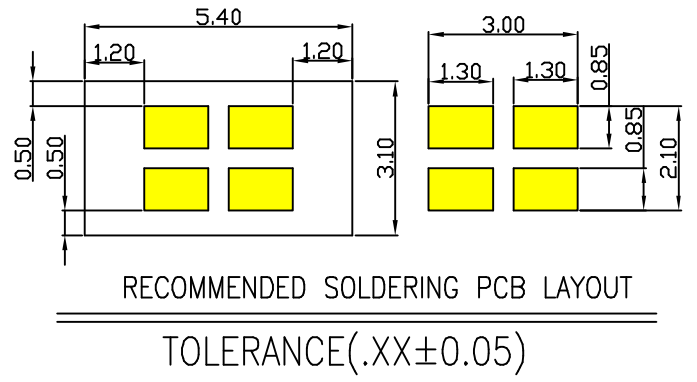


1 2 3 4 5 6 7 8

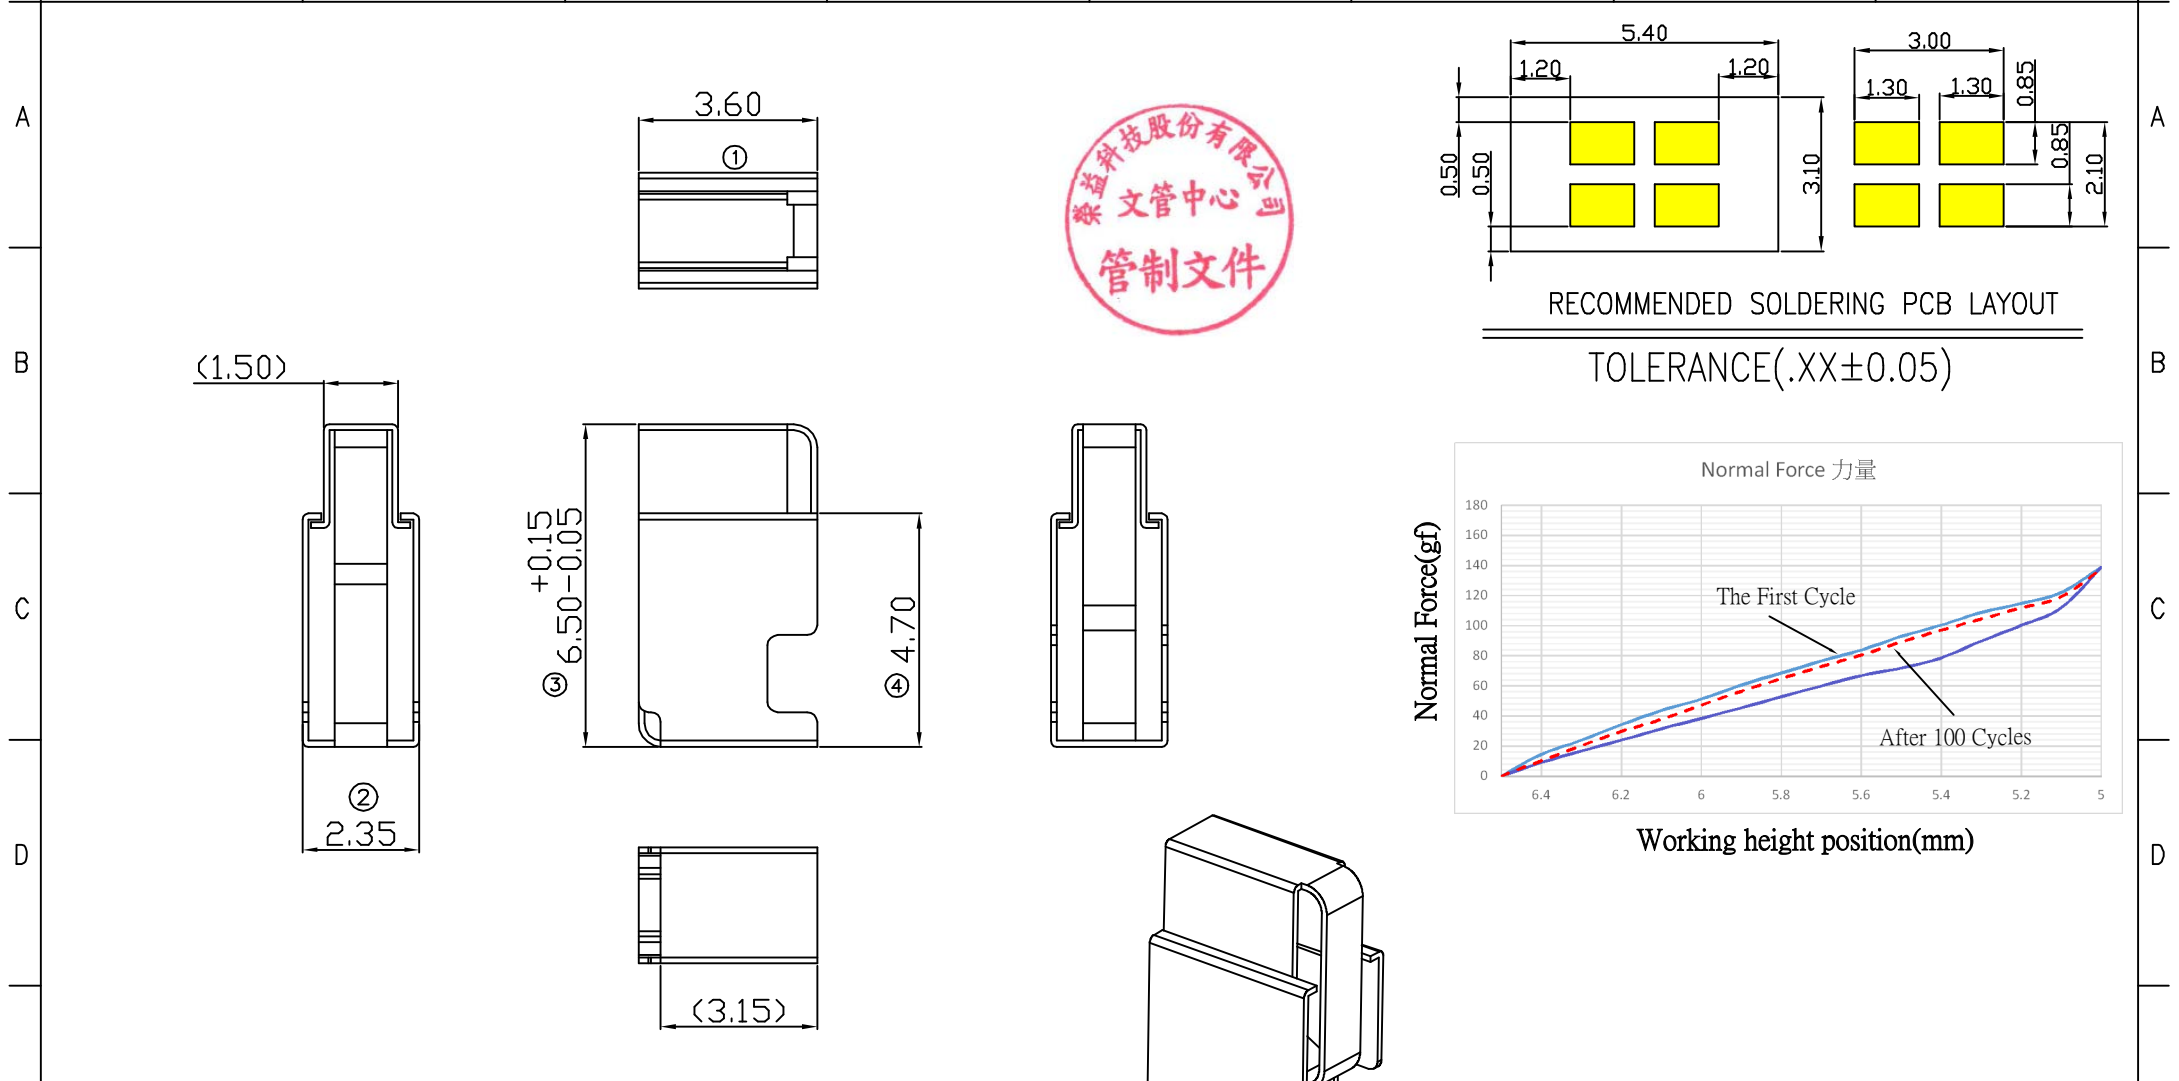

Note:  
 1. Material: Titanium copper Thickness 0.12mm  
 2. Electroplate:  
     Gold Flash on contact area  
     Gold Flash on solder area  
     Nickel underplating over all  
 3. Electrical Characteristics:  
     3-1 Current Voltage: 12V  
     3-2 Current Rate: 3A  
     3-3 Contact Resistance: Normal Compression<30mΩ  
 4. Working Height of Application: 5.0~6.0 mm  
 5. Spring Force Tolerance is ±20gf  
 6. Operating Temperature: -20℃~+85℃

TOLERANCE/CLASS			
RANGE(mm)	1	2	3
≤30	+ 0.1	+ 0.15	+ 0.2
30< - ≤120	+ 0.15	+ 0.2	+ 0.3
120< - ≤300	+ 0.2	+ 0.3	+ 0.5
300<	+ 0.3	+ 0.5	+ 0.8
ANGLES	+ 2.5°		

01	2022-05-11	修改PAD					
REV	Date	Description					
DRAFT	Lydia Tsai	DATE	07/20-'20	RoHS Compatible			
CHECKER	Justin Wu	DATE	07/20-'20				
APPROVAL	Timothy Chen	DATE	07/20-'20	SHEET	SCALE	UNIT	☉
				1-2	Not to scale	mm	
<b>EMI STOP CORP.</b> EMI STOP EMISTOP ST-65Q1G				CUS P/N			

1 2 3 4 5 6 7 8